


INT69 U2® Diagnose


INT69 U2® Diagnose



INT69 U2 Diagnose

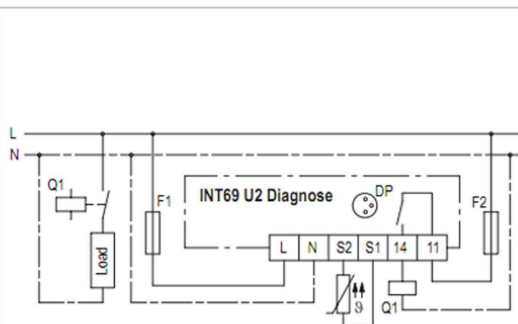

Wiring diagram

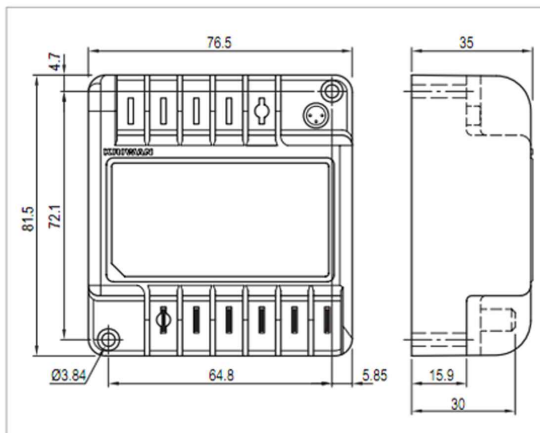

Dimensions in mm

Application

The phase monitor INT69 U2 Diagnose is a further development of the reliable KRIWAN phase monitors. An additional input for a PTC as well as the flexible-response protective functions help to improve the availability and extend the service life of the system.

It is used in any situation where impermissible voltages may cause damage or prevent proper function of the monitored system.

Functional description

If the value is out of tolerance, then the voltage monitor initiates a shutdown without delay.

When the supply voltage is connected to the voltage monitor, the supply network is automatically detected. This is to determine the applicable limit values.

The additional temperature monitoring is done according to the static evaluation process; switch-off will ensue immediately if the temperature limit is reached.

After repair of the error and a subsequent reset delay, the system is connected again.

The INT69 U2 Diagnose monitors the applied module supply voltage and creates a warning regarding the diagnosis interface as soon as it drops below a fixed specified limit value.

The sensor, relay and supply current circuits are galvanically isolated from each other.

The built-in LED signals the current status of the phase monitor (see flash code).



The mounting, maintenance and operation are to be carried out by an electrician. The valid European and national standards for connecting electrical equipment have to be observed.

Connected sensors and connection lines that extend from the terminal box have to feature at least a basic insulation.

See back side for further specifications

Technical changes reserved


INT69 U2® Diagnose

INT69 U2® Diagnose

Flash code

The KRIWAN flash code allows for a quick and easy status display and troubleshooting.

The flash code consists of a cyclical red and orange flash sequence. The current status can be determined from the number of pulsing flashes.

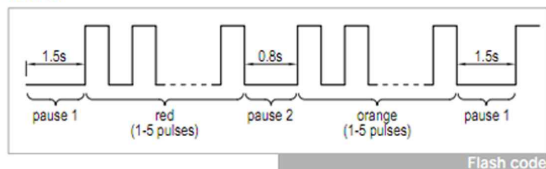

Overview flash code

Green lit	Mains voltage available
Red/Orange flashing	Error, system is switched off, see below for description

1st flashing sequence (LED red)	2nd flashing sequence (LED orange)	Description
1	1	Temperature monitoring: Static switch-off, permissible temperature exceeded
	3	Temperature monitoring: Reset delay after static switch-off
	4	Temperature monitoring: Sensor input detected open circuit
2	3	Mains voltage monitoring Under-/overvoltage
	4	Mains voltage monitoring Reset delay after "Mains voltage monitoring" error
3	1	General: Supply voltage too low
	3	General: Module error

Order data

INT69 U2 Diagnose	22 A 636 S021
Accessories and application information	see www.kriwan.com

Technical specifications

Supply voltage	115-230V ~ 50Hz ±10% 3VA 120-240V ~ 60Hz ±10% 3VA
Permissible ambient temperature T _A	-30...+70°C
Temperature measuring circuits	
- Type	1-2 AMS sensors in series alternative 1-9 PTC sensors acc. to DIN 44081, DIN 44082 in series
- R _{25, total}	<1.8kΩ
- R _{trip, static}	4.5kΩ ±20%
- R _{reset}	2.75kΩ ±20%
- Max. length connection line	10m
Short circuit monitoring system PTC	Typically <30Ω
Mains voltage monitoring	
- Monitoring range 1	110V-120V ~ 50/60Hz
Mains voltage recognition	≤150V
Accuracy	±5% of the measuring range
Undervoltage preliminary warning	<103V
Undervoltage shutdown	<98V
Overvoltage preliminary warning	>127V
Overvoltage shutdown	>132V
- Monitoring range 2	220-240V ~ 50/60Hz
Mains voltage recognition	>150V
Accuracy	±5% of the measuring range
Undervoltage preliminary warning	<187V
Undervoltage shutdown	<177V
Overvoltage preliminary warning	>244V
Overvoltage shutdown	>265V
Reset delay	
- Motor temperature static	30min ±5min
- Undervoltage	1min ±6s
- Overvoltage	1min ±6s
Reset of reset delay	Main reset >5s only possible if there is no error current
Relay	
- Contact	240V ~ 2.5A C300 Min. 24V ~ / ~ 20mA
- Mechanical service life	Approx. 1 million switching cycles
Interface	Diagnose port (DP)
Protection class acc. to EN 60529	IP00
Connection type	6.3mm flat plugs
Housing material	PA glass-fibre-reinforced
Mounting	Screw mounted
Dimensions	See dimensions in mm
Weight	Approx. 200g
Check base	EN 61000-6-2, EN 61000-6-3 EN 61010-1 Overvoltage category II Pollution level 2

Technical changes reserved