

17AME 塑封
Plastic sealed case

17AME-S加强系列热保护器是在17AME热保护器的基础上加上耐高温工程塑料,并环氧灌封,使其具有外壳绝缘,高密封性及防水功能。它更适用于真空浸漆马达、防水电热垫、电热毯等产品。




产品特性

- 外壳绝缘，更安全可靠；
- 具有防水功能；
- 可承受真空浸漆；
- 适用于单一温度，出厂前温度预设。

应用范围

真空浸漆马达、防水电热垫、电热毯

尺寸图 Dimensional Drawings




17AME-S seires is a complete 17AME with a plastic housing and sealed by epoxy. It has better insulation, sealing and water proof properties. The applications are vacuum varnishing motor, water proof heating pad and blankets.

Dimensional Drawings


- Insulation housing, safer and more reliable；
- Water Proof
- Applicable to vacuum varnish
- Applicable to control a single temperature rating.
The action temperature is fixed before releasing.

Application

Vacuum varnishing motor, water proof heating pad, electrical blanket

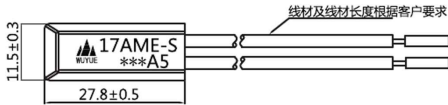

产品标示 Marking：

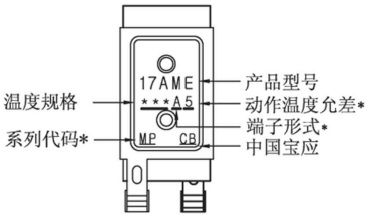

动作温度允差 * Action temperature tolerance	
代号 Code	允 差 tolerance
5	±5℃
3	±3℃

端子形式 * Terminal Direction	
代号 Code	端子方向 Terminal Direction
A	端子是相同的方向 Terminals at the same end
B	端子是相反的方向 Terminals at the opposite end

系列代码 * Model Definition	
代码 Code	说 明 Description
CG	常规系列: 250V 10A Common type
MP	电流系列: 精确控制跳脱时间 Current sensing type: accurate trip off time control
DI	大电流系列: 250V 20A Big current type

温度代号及对照温度:Temperature code

No.	OFF 温度(℃)	ON 温度(℃)
018	55	38
019	60	40
020	65	45
021	70	50
022	75	55
023	80	57
024	85	60
025	90	62
026	95	65
027	100	67
028	105	70
029	110	72
030	115	75
031	120	78
032	125	82
033	130	85
034	135	90
035	140	93
036	145	95
037	150	100
038	155	102
039	160	105
040	165	110
041	170	115
042	175	118
043	180	120